
#### 3-WAY 4-SPEAKER SYSTEM

# LS-V720-B SERVICE MANUAL

## KENWOOD

©2000-6/B51-5637-00 (Z/K)86

#### **EXTERNAL VIEW**

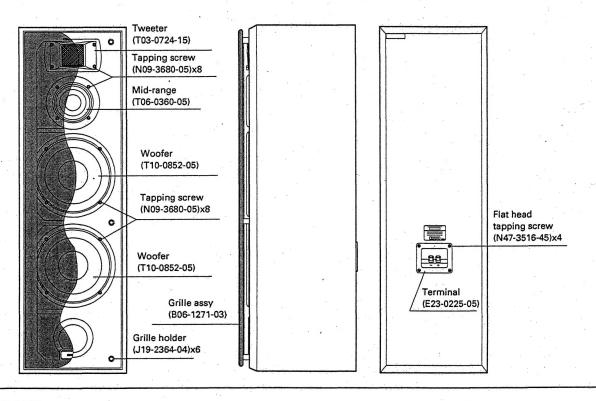

#### **SPECIFICATIONS**

Enclosure	Bass-reflex type
Woofer	
Mid-range	100 mm, (4 in) cone type
Tweeter	Linaeum type
Impedance	Ω 8
Maximum input level	
Frequency response	35Hz ~ 30,000 Hz
Dimensions	
	H: 900mm (35-7/16")
	D: 298mm (11-3/4")
Net Weight	16.0 kg (35.3 lb / piece)

Note


KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

### LS-V720-B

### **DIVIDING NETWORK UNIT/PARTS LIST**

#### **DIVIDING NETWORK UNIT**

(X21-7500-20)

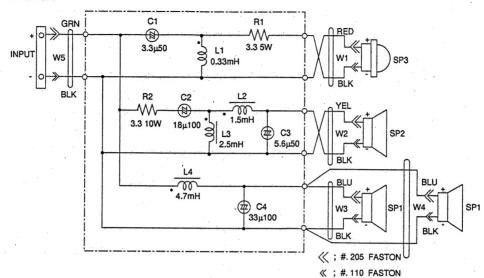

#### **PARTS LIST**

\* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnes dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref.	No.	Address	New Parts			Description	on	Desti- nation	Re- marks
				. L	S-V720-B		<del>,</del>	!	-
-			*	B06-1271-03 B46-0330-03 B59-1104-00 B61-1077-00	GRILLE ASSY WARRANTY O SERVICE DIRE INSTRUCTION	CARD ECTORY			
-				E23-0225-05 E30-5505-05	TERMINAL SPEAKER COI	RD			
- - -			*	H10-6513-08 H10-6522-08 H21-1309-08 H51-1517-08	POLYSTYREN POLYSTYREN PROTECTION ITEM CARTON	E FOAMED SHHT			
- '				J19-2364-04	GRILLE HOLD	ER			
SP1 SP2 SP3				T10-0852-05 T06-0360-05 T03-0724-15	WOOFER MID-RANGE TWEETER				
				DIVIDING NETW	ORK UNIT(X	21-7500-2	20)		
C1 C2 C3 C4				C90-2252-05 C90-1108-05 C90-2255-05 C90-1111-05	NP-ELEC NP-ELEC NP-ELEC NP-ELEC	3.3UF 18UF 5.6UF 33UF	50WV 100WV 50WV 100WV		
-				J31-0329-05	COLLAR	•			
L1 L2 L3 L4		) ) 		L38-0516-05 L38-0379-05 L38-0452-05 L38-0585-05	COIL COIL COIL	0.33mH 1.5mH 2.5mH 4.7mH	•		
R1 R2				R92-0842-05 R92-0894-05	CEMENT CEMENT	3.3 K 3.3 K	5W 10W		

L: Scandinavia

K: USA

P: Canada

R: Mexico

C: China

I: Malaysia

Y: PX(For East Hawaii) T: England

E: Europe Q: Russia

G: Germany

V: China(Shanghai)

Y: AAFES(Europe)

X: Australia

H: Korea

M: Other Areas